



# TITAN XT™



## WerkMaster Titan XT Commercial Grinder & Polisher



The WerkMaster Titan XT is the most aggressive surface prep machine in its class, designed to exceed the needs of the professional contractor. The Titan XT is used for commercial, residential, and maintenance projects and is available in 230V or 460V models.

**7 Machines in 1 – Grinds, strips, sands, polishes, buffs, burnishes, and edge to with 1/8" (3 mm) of the wall.**

Removes thinset, epoxy, glue, paint,

mastic, and micro toppings; works on spalled or rained out concrete.

Runs wet or dry on concrete, stone, hardwood, terrazzo or VCT tile.

Features WerkMaster Octi-Disc™ technology with 8 counter rotating heads and the versatility of using our 6 3/4" (171 mm) ULTRA-FLEX Plug 'N Go tooling.

Easy to use and operator friendly, weighs only 580 lbs (263 kg) with a 20" (51 cm) footprint and an auto sensing dual voltage variable frequency drive (230V model only) with a disc rotation speed range of 450 – 1950 rpm.

Runs on single phase or 3 phase power.

### TITAN XT 230 or 460 MODEL

Footprint: in (cm)	20 (50.8)
Disc Size: in (cm)	6 3/4 (17.1)
Weight: lbs (Kg)	580 (263)
Disc Speed Range: RPM	450-1950
Horsepower	10
Voltage: VAC	208-230 380/460
Frequency: Hz	50/60
Electric Phase: Ph	1,3 Dual   3
Breaker Size: Amp	30
Vacuum Req: CFM	300+
Min. Generator: kW	11.5+
Max Cable Length: ft (m)	350+ (107+)



Please visit <http://www.werkmaster.com/product-videos/> for a demonstration of techniques using WerkMaster Machines for removing various adhesives and substrates from concrete.

## Features & Benefits



Professional grade floor coating removal and polishing - the new Titan XT has been engineered with speed in mind for the busy contractor in an ever increasing competitive market




Edges to 1/8" (3 mm) of wall. No need for any additional machines to perform edging! Save time, money and get off your knees with the new Titan XT

### TITAN XT 230/460 MODEL

Glue sq ft/hr (m <sup>2</sup> /hr)	450-650 (42-60)
Paint sq ft/hr (m <sup>2</sup> /hr)	550-900 (51-84)
Epoxy sq ft/hr (m <sup>2</sup> /hr)	500-800 (46-74)
Thinset sq ft/hr (m <sup>2</sup> /hr)	550-900 (51-84)
Concrete sq ft/hr (m <sup>2</sup> /hr)	700-1000 (65-93)
Grind & Polish sq ft/DAY (m <sup>2</sup> /DAY)	1500-2500 (139-232)

**RUNS ON SINGLE  
OR 3 PHASE POWER  
230 or 460 V MODELS  
AVAILABLE**

### ULTRA-FLEX DRIVE™

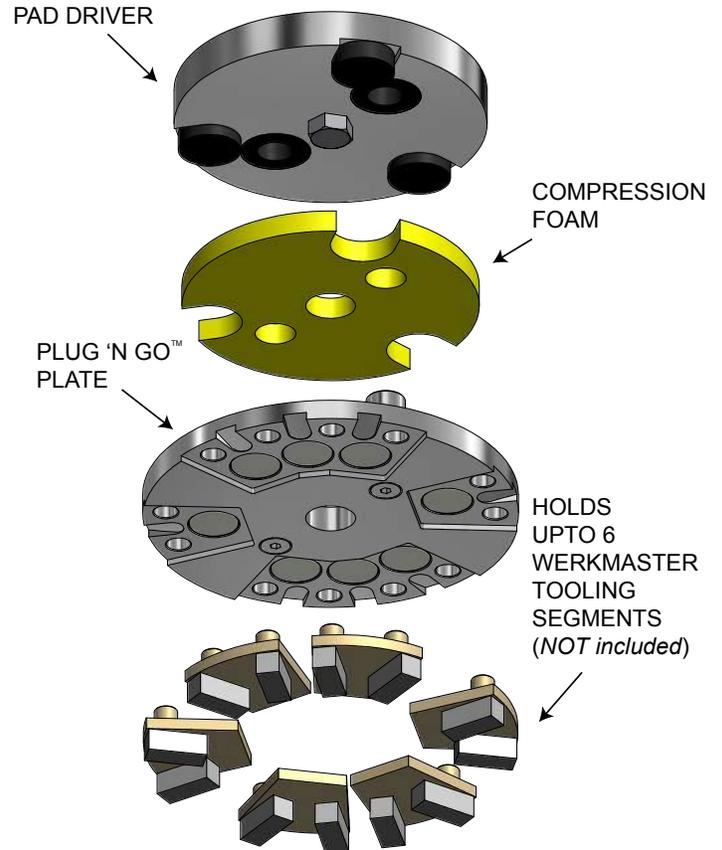

**Just PLUG 'N GO.** When it comes to all WerkMaster machines, putting on and removing your tooling is a breeze.

Strong earth magnets and clip-in tooling save time on any job