

Ultra Floor Systems

Taking it to the Wall!



COLOSSOS E



WerkMaster Colossos XT Industrial Grinder & Polisher



The WerkMaster Colossos XT is the largest model in the WerkMaster family, designed to meet the needs of the professional contractor and used for commercial, industrial, and maintenance projects.

Available in 230V or 460V models.

Machines in 1 – Grinds, strips, scarifies, polishes, buffs, burnishes, and edges to with 1/8" (3 mm) of the wall

mastic, and micro toppings; works on spalled or rained out concrete

- ☑ Runs wet or dry on concrete, stone, hardwood, terrazzo or VCT tile
- Features WerkMaster Octi-Disc[™] technology with 8 counter rotating heads and the versatility of using our 8" (203 mm) ULTRA-FLEX Plug 'N Go tooling
- ☑ Easy to use and operator friendly, weighs only 820 lbs (372 kg) with a 24" 61 cm) footprint, auto sensing dual voltage (230V and 460V) 3 phase variable frequency drive with a disc rotation speed range of 450 –1950 RPM
- The dual action wet/dry vacuum port allows for dry, dust-free pick up and can be used with our optional water feature

COLOSSOS XT 230/460 V	
Footprint: in (cm)	24 (61)
Disc Size: in (cm)	8 (20.3)
Weight: lbs (Kg)	820 (372)
Disc Speed Range: RPM	450-1950
Horsepower	20
Voltage: VAC	208/460
Frequency: Hz	50/60
Electric Phase: Ph	3
Breaker Size: Amp	50 30
Vacuum Req: CFM	500+
Min. Generator: kW	25.5+
Max Cable Length: ft (m)	350+ (107+)

Please visit http://www.werkmaster.com/product-videos/ for a demonstration of techniques using WerkMaster Machines for removing various adhesives and substrates from concrete.



Taking it to the Wall!

Features & Benefits



Industrial grade floor coating removal and polishing – the new Colossos XT has been engineered with speed in mind for the busy contractor in a highly competitive market




EZ Bak tilt feature allows for operators weighing 135 pounds or more to easily tilt back the machine to change tooling and for transporting

COLOSSOS XT 230/460 MODEL Glue sq ft/hr (m²/hr) 650-900 (42-84) Paint sq ft/hr (m²/hr) 900-1200 (84-111) Epoxy sq ft/hr (m²/hr) 800-1100 (74-102) Thinset sq ft/hr (m²/hr) 900-1800 (84-167) Concrete sq ft/hr (m²/hr) 1000-2500 (93-232) Grind & Polish sq ft/DAY (m²/DAY) 1500-3500 (139-325)

RUNS ON
3 PHASE POWER
230 or 460 V MODELS
600V MODEL COMING SOON!

ULTRA-FLEX DRIVE[™]

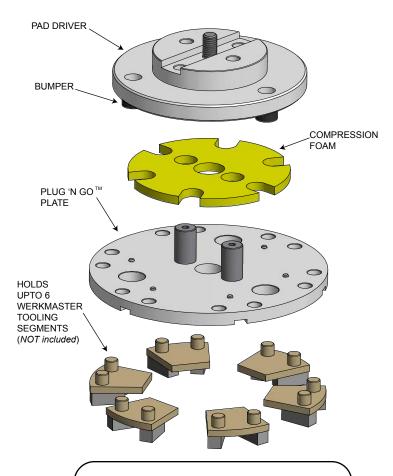

Just PLUG 'N GO. When it comes to all WerkMaster machines, putting on and removing your tooling is a breeze.

Strong earth magnets and clip-in tooling save time on any job.

Please visit http://www.werkmaster.com/product-videos/ for a demonstration of techniques using WerkMaster Machines for removing various adhesives and substrates from concrete.